

1'x 4' Backlit Panel



25W, 30W, 40W Selectable | Colour Tunable | 120-347V

High performance, light-weight luminaire suitable for lay-in, surface, or pendant mounting
Ideal for use in schools, health care applications, offices, retail spaces, and more

Welded And Assembled
With Robotic Technology
for consistent quality control

Less than 2.2" Deep
ideal for tight plenum areas


Seismic Clips Included

Waffle Stamping
increases heat dissipation
and driver life

Ultra-thin, Seamless
Aluminum Frame

Non-yellowing
Frosted Lens

120-347V, 0-10V
Dimmable Driver

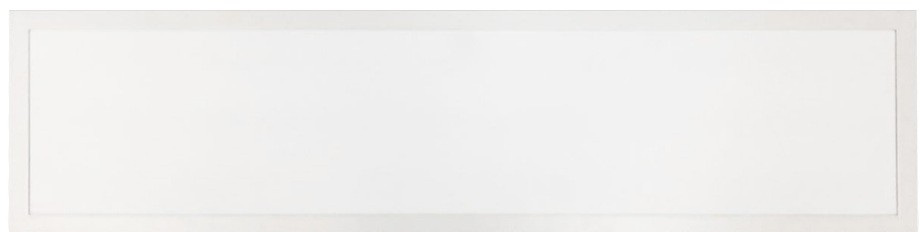

CCT Tunable
(3500K / 4000K / 5000K)

Selection Shown: 50K Selection Shown: 40K Selection Shown: 35K

Wattage Selectable
(25W / 30W / 40W)

Selection Shown: 40W Selection Shown: 30W Selection Shown: 25W

Accessories (Sold Separately)

NOTE: OJ-626 is **required** for 347V applications



Luminaire Disconnect for 347V
OJ-626



Suspension Kit
PLB-SUSKIT



Surface Mount Kit
PLB14-SK



Recessed Frame Kit
PLB14-RFK

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	4,521.3 lm
Efficacy	113.96 lm/W
CCT	Tunable (35K/40K/50K)
CRI	82.4
Dimmable	0-10V
Beam Angle	120°
L70 Life	50,000 hrs
Warranty	7-year

APPROVALS AND LISTINGS

cUL	E491106
DLC	PLIID5EJIDX5

ISOCANDELA PLOT

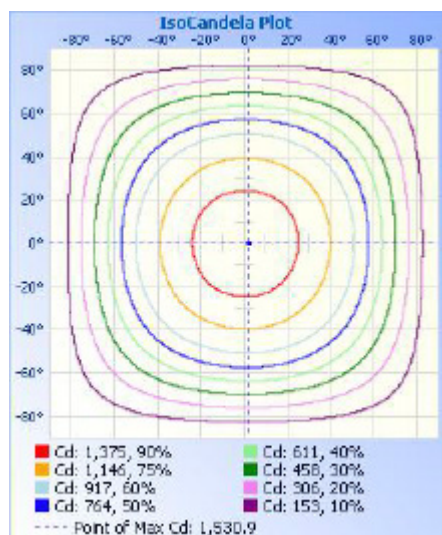

ELECTRICAL

Wattage	Selectable (25W/30W/40W)
Voltage	120-347V
Power Factor	0.96
THD	12.45 %
Operating Temp	-20 to 40°C

CONSTRUCTION

Housing	Metal
Finish	White
IP Rating	IP20
Product Dimensions	1209 x 301 x 55 mm
Carton Qty	2

ACCESSORIES (SOLD SEPARATELY)

PLB14-SK	Surface Mount Kit
PLB14-RFK	Recessed Frame Kit
PLB-SUSKIT	Suspension Kit
OJ-626	Luminaire Disconnect for 347V

NOTE: OJ-626 is **required** for 347V applications

ILLUMINANCE AT A DISTANCE

