



Exclusively Distributed by:

A&A Optoelectronics LTD

2750 14th Avenue, #G08, Markham, ON, Canada, L3R0B6

Tel: 905-604-1129 Fax: 905-604-1908 www.aaoptoelectronics.com

cUL & DLC listed LED Vapour Proof

Model: KK-TP-4EW-40-5USB SKU: 900015

120 lumens per watt!



Description: LED Vapour Proof fixture, 40W, 5000K, 4800LM, AC110-277V

➤ **Features**

- No RF interference, no buzzing and no UV radiation
- Easy to install and maintain
- Replacement of traditional Water Tight/Vapour Proof fixtures, IP65/IK08
- Environment-friendly, mercury-free and lead-free
- High efficiency and energy-saving up to 75%
- life time over 50,000 Hours, 5 years warranty



cUL: E471658


➤ **Application**

- General industry requires water, weather and/or dust resistant lighting application
- Storage areas, farms, underground parking, food industry, painting industry, etc.



➤ **Basic Specs**

SKU	Dimension	Operating Temperature	Material	Typical life Expectancy (LM79)	Input Power
900015	L1280*W78*H63mm	-20 to 55 C	PC+ALUMINUM	>50,000 Hrs	AC110-277V

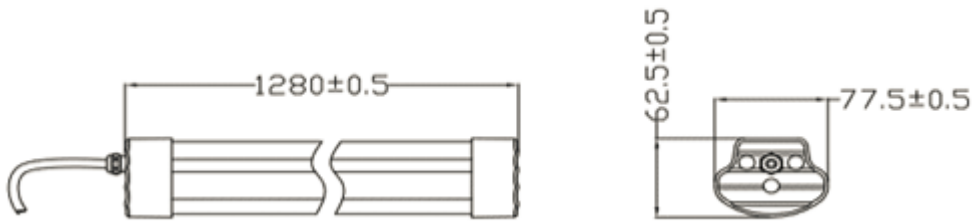

➤ **Electrical parameter (Temperature=25°C)**


Lumens/Watt	Working Humidity	Frequency (Hz)	Rated Power (W)	Efficiency
120LM/W	15%~90%RH	50/60	40W	>90%

➤ **Optical Parameter (Temperature=25°C)**


THD	Color Temperature	CRI (Ra)	Lumens. (lm)	Lighting Beam Angle(°)
<20%	5000K	80	4800LM	140




cUL : E471658

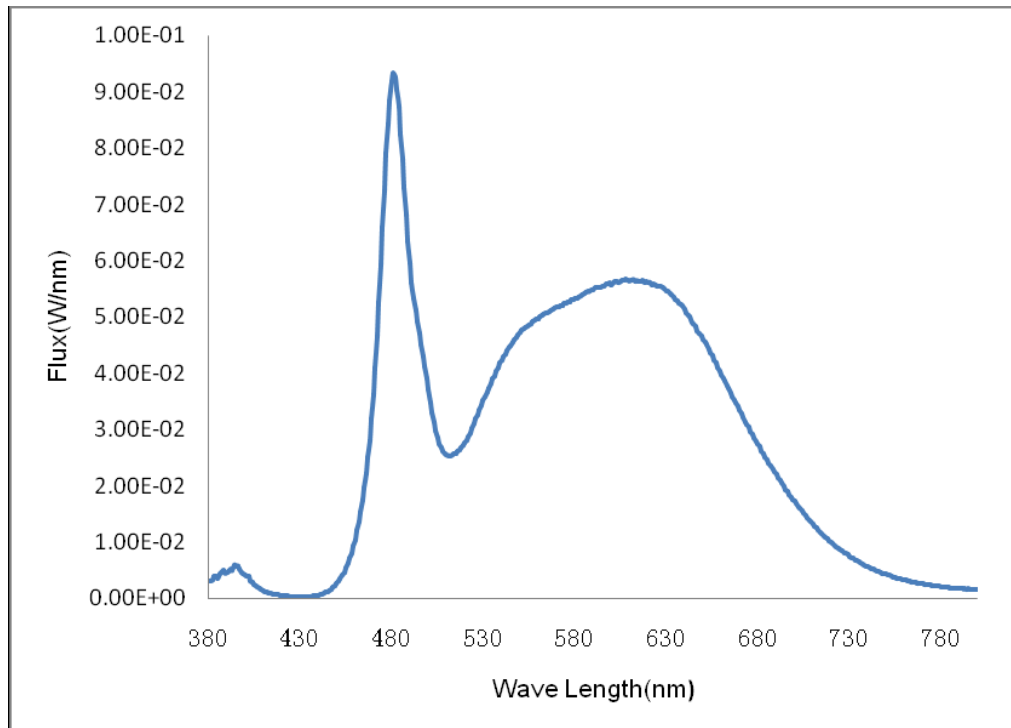

4.2 Chromaticity Diagram (CIE 1931)

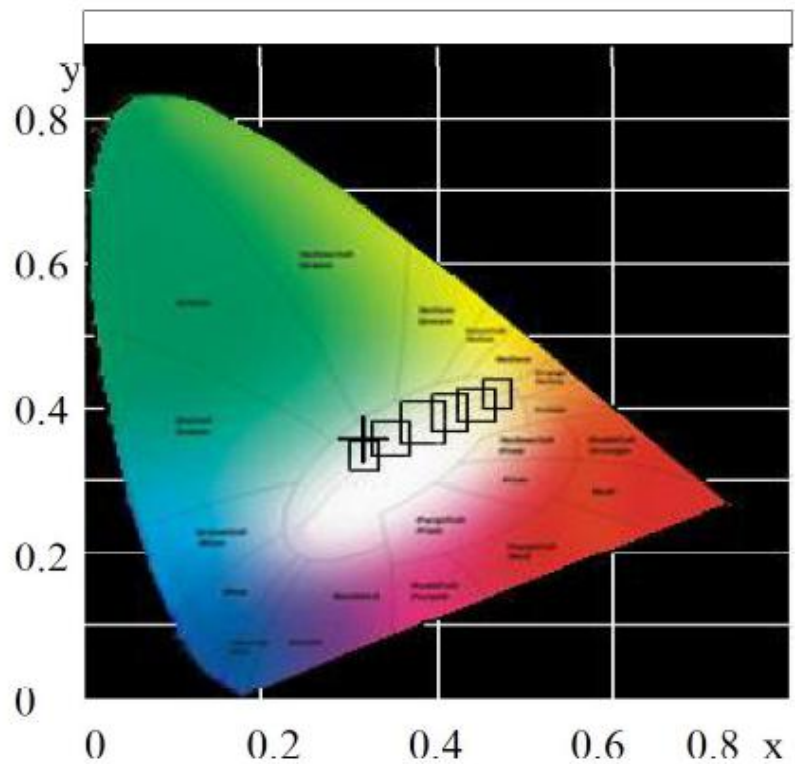

4.3 ANSI Chromaticity Quadrangles Diagram

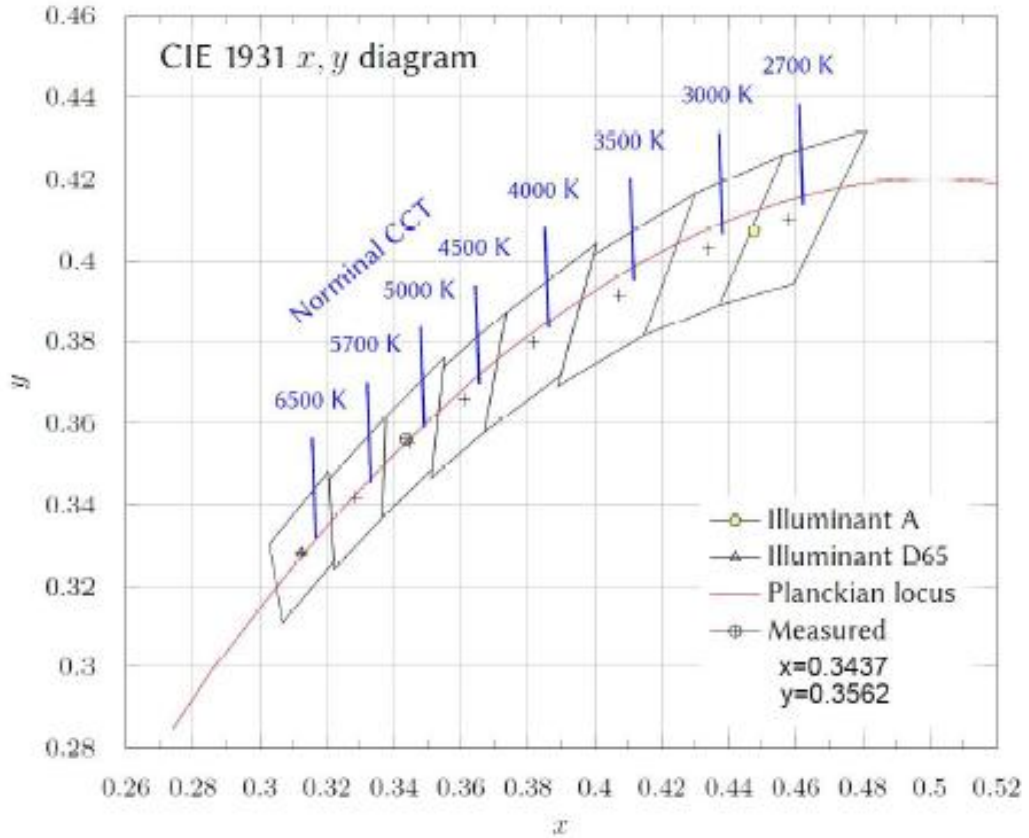

4.4 Color Rendering Details

R1	R2	R3	R4	R5
82	89	93	83	83
R6	R7	R8	R9	R10
84	88	68	12	74
R11	R12	R13	R14	R15
82	62	85	96	77